



## 1. Set the TV-RGB Switch Setting

- RGB outputs the signal to RGB and HDMI OUTPUT port of V300AFHD.
- TV outputs the signal from RS232/CVBS port thru RCA connection.

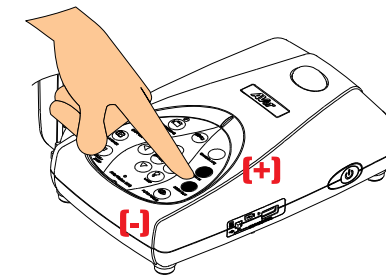

## 7. Basis Operation

Press **+** to zoom in and **-** to zoom out the image.

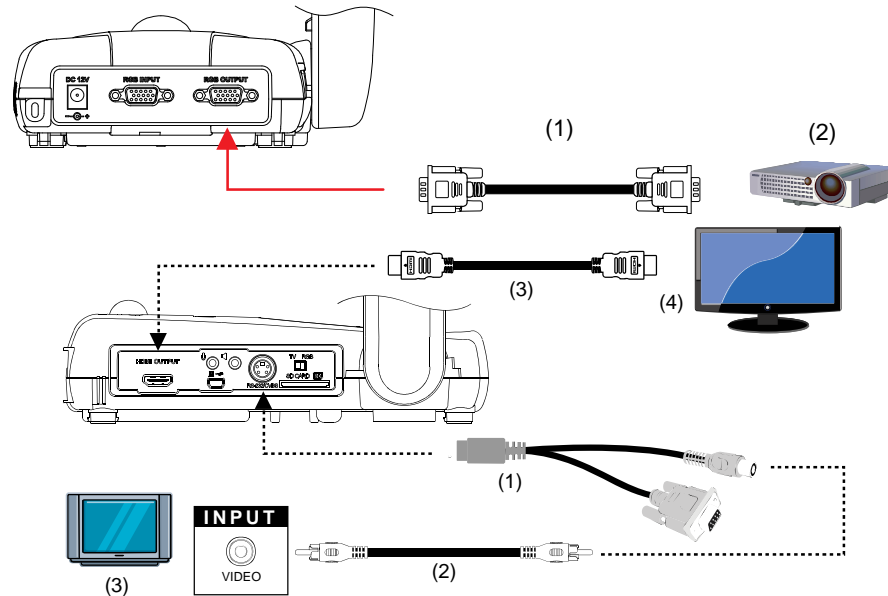


## 2. Connect the Video Output Display

### A. RGB Connection

- RGB Cable
- LCD/DLP Projector
- HDMI Cable
- HDMI Monitor


### B. TV Connection

- RS-232/CVBS Cable
- RCA Cable
- Television

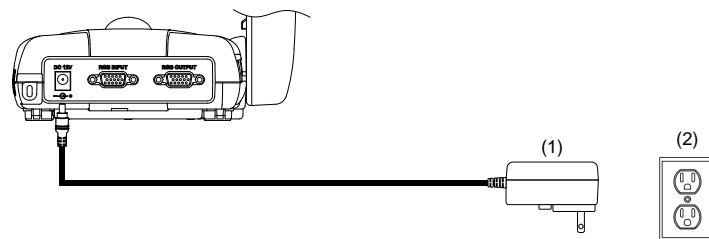


## 3. Connect the Power

- Power Adapter
- Wall Outlet




## 4. Set the OSD Language

Press MENU, select SYSTEM > LANGUAGE, then press ENTER and choose the language setting you prefer.

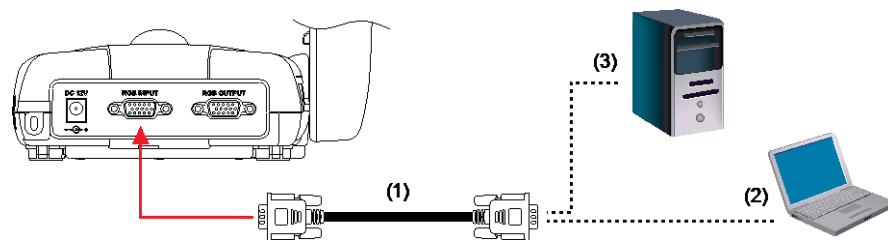


## 5. Connect a Computer to Show Computer Presentation

- RGB Cable
- Laptop
- Desktop

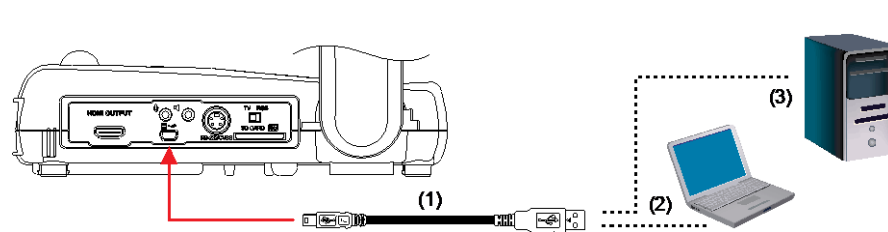


## 6. Connect via USB to Transfer the Captured Image to a PC or Use V300AFHD as a USB Camera with the Bundled Software


- USB Cable
- Laptop
- Desktop

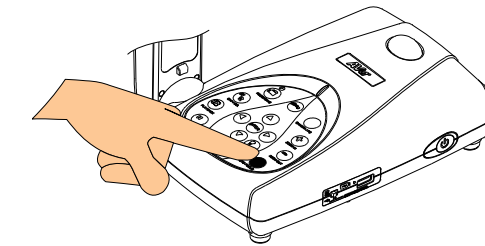


Press **Focus** to adjust the focus automatically.

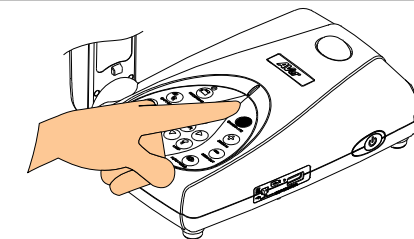


- Press CAMERA/PC to switch between Camera and Computer mode.
- For laptop, make sure to switch the output display to an external video output device. Refer to the laptop keyboard command (FN+F5) to switch between display outputs.

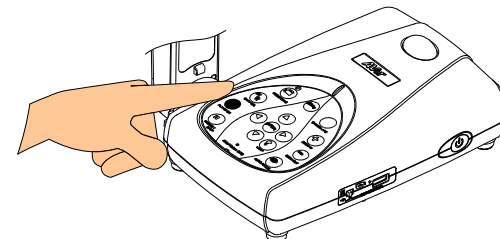


Press **Play** to view the captured image from the memory.

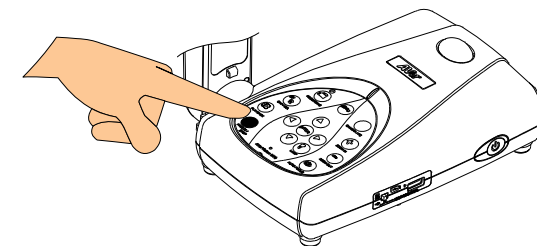

Press **Pause** to pause or resume the live image from the camera or stop video playback.

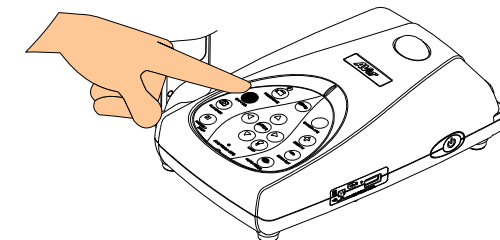

Press **Capture** to capture and save the image in the built-in memory. In playback mode, use this to delete the selected file.

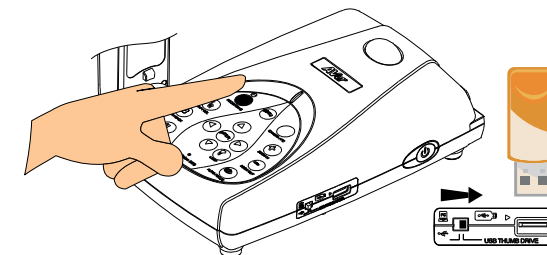

Press **Record** to start/stop audio & video recording with either USB flash drive or SD memory card. If USB flash drive is used, make sure **USB** switch is set to the right.