

# **Aver AmpliWave Lite Audio System**

## **(SA-A5)**

— **User Manual** —

The power cord shall be connected to a socket-outlet with earthing connection.

This product is intended to be supplied by a UL Listed Certificate power adapter and power cord, output comply with LPS or PS2, rated 19Vdc, 3.42A min., and Tma 35 degree C min. Please contact manufacturer, UL File owner or AVer for further information and assistance.

### **Federal Communication Commission Interference Statement**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

### **For Wireless Device:**

#### **For SAT5 Pendant Microphones:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying the RF exposure compliance.

#### **For SAR5 Microphone Receiver:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

## **IC Notice**

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

## **For SAT5 Pendant Microphones:**

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé.

## **For SAR5 Microphone Receiver:**

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20cm de distance entre la source de rayonnement et votre corps.

## **Europe – EU Declaration of Conformity**

This device complies with the essential requirements of the Radio Equipment Directive (2014/53/EU). The following test methods have been applied in order to prove presumption of conformity with the essential requirements of the Radio Equipment Directive (2014/53/EU).

## **DISCLAIMER**

No warranty or representation, either expressed or implied, is made with respect to the contents of this documentation, its quality, performance, merchantability, or fitness for a particular purpose. Information presented in this documentation has been carefully checked for reliability; however, no responsibility is assumed for inaccuracies. The information contained in this documentation is subject to change without notice.

In no event will AVer Information Inc. be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or inability to use this product or documentation, even if advised of the possibility of such damages.

## **TRADEMARKS**

“AVer” is a trademark owned by AVer Information Inc. Other trademarks used herein for description purpose only belong to each of their companies.

## **COPYRIGHT**

©2024 AVer Information Inc. All rights reserved. | September 10, 2024

All rights of this object belong to AVer Information Inc. Reproduced or transmitted in any form or by any means without the prior written permission of AVer Information Inc. is prohibited. All information or specifications are subject to change without prior notice.

## More Help

For FAQs, technical support, software and user manual download, please visit:

### Non-USA

Download Center: <https://www.aver.com/download-center>

Technical Support: <https://www.aver.com/technical-support>

### USA

Download Center: <https://www.averusa.com/education/support>

Technical Support: <https://averusa.force.com/support/s/contactsupport>

## Contact Information

### Headquarters

AVer Information Inc.

8F, No.157, Da-An Rd., Tucheng Dist.,

New Taipei City 23673, Taiwan

Tel: +886 (2) 2269 8535

### USA Branch Office

AVer Information Inc., Americas

44061 Nobel Drive, Fremont, CA 94538, USA

Tel: +1 (408) 263 3828

Toll-free: +1 (877) 528 7824

### Europe Branch Office

AVer Information Europe B.V.

Westblaak 134, 3012 KM, Rotterdam, The

Netherlands

Tel: +31 (0) 10 7600 550

### Japan Branch Office

アバー・インフォメーション株式会社

〒160-0023 日本東京都新宿区西新宿 3-2-26 立

花新宿ビル 7 階

Tel: +81 (0) 3 5989 0290

お客様サポートセンター(固定電話のみ): +81 (0) 120  
008 382

### Vietnam Branch Office

Công ty TNHH AVer Information (Việt Nam)

Tầng 5, 596 Nguyễn Đình Chiểu,

P.3, Quận 3,

Thành phố Hồ Chí Minh 700000, Việt Nam

Tel: +84 (0) 28 22 539 211

Hỗ trợ kỹ thuật: +84 (0) 90 70 080 77

### Korea Office

한국 에버 인포메이션 (주)

서울시 종로구 새문안로 92

(신문로 1가, 광화문오피시아빌딩) 1831,

1832 호

Tel: +82 (0) 2 722 8535

# Contents

<b>Overview</b> .....	<b>1</b>
Package Contents.....	1
SAB5V2 Streaming Audio Box .....	1
Pendant Microphones .....	1
Dimensions .....	2
Controls and Connections.....	3
SAB5V2 Streaming Audio Box .....	3
Pendant Microphones .....	5
Power Connection.....	6
<b>Getting Started</b> .....	<b>6</b>
Set up Your SAB5V2 Streaming Audio Box .....	6
Insert the Microphone Receiver (Dongle).....	6
Set up Your Microphone.....	7
Pair Your Pendant Microphone.....	7
Use Your Microphone .....	8
For Emergencies.....	9
Charge Your Microphone .....	9
Replace Your Microphone Battery.....	10
Set up Your Speakers .....	10
Connect Your Speaker Cables .....	10
Audio Features.....	11
Page Mute.....	11
Audio Output to Assistive Listening Devices (ALD) .....	12
In the Classroom .....	13
Hybrid Learning.....	14
<b>Web Application Settings</b> .....	<b>16</b>
Access to the web application.....	16
Device Status.....	18

Audio.....	19
Network.....	21
System.....	23
<b>Specification .....</b>	<b>24</b>
SAB5V2 Streaming Audio Box.....	24
Pendant Microphones .....	26
Wireless Receiver Dongle.....	27
Environmental Specifications .....	27
<b>Troubleshooting .....</b>	<b>28</b>


# Overview

## Package Contents


### SAB5V2 Streaming Audio Box




SAB5V2 Streaming Audio Box



Power Adapter  
& Power Cord(s)



3.5 Stereo to 3.5  
Stereo Cable (10m)




USB 3.0 Type-C to Type-A  
Cable (1.83m)



SAB5V2 QR Code Card


### Pendant Microphones




SAT5 Pendant Microphones




Lanyard (x2)



USB 3.0 Type-C to Type-A  
Cable (1.5m)



SAR5 Microphone Receiver  
(Dongle)




Wall Mount Type Adapter




# Dimensions

## SAB5V2 Streaming Audio Box

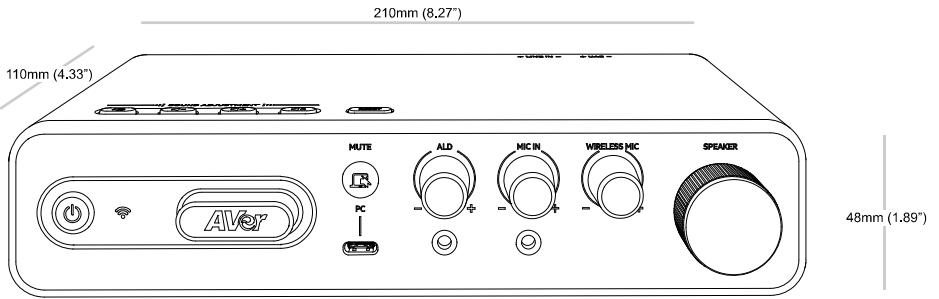


## Pendant Microphones

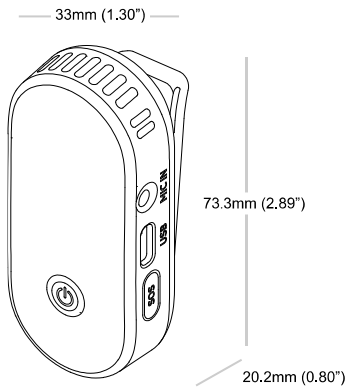

# Controls and Connections

## SAB5V2 Streaming Audio Box

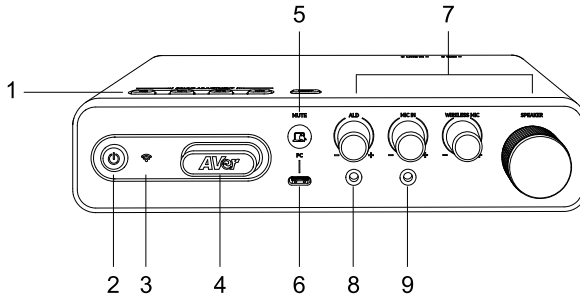

### Top Cover

1. Sound Adjustment Buttons

### Front Panel

2. Power Button

**Short press:** Power on.

**Long press for 5 seconds:** Enter Standby Mode.

- Solid green: Power on
- ★ Flashing green: Start-up
- Solid red: Wake-on-LAN mode (when connected to power)
- ★ Flashing red: Updating firmware
- Solid orange: Input lock mode

3. Status LED

- Solid blue: Microphone(s) is paired
- Off: Microphone(s) isn't paired

4. Microphone Receiver (Dongle) Slot and Plug

5. PC Mute Button

- Solid red: PC is muted
- Off: PC isn't muted


6. PC (USB Type-C) Port

7. Volume Controls:

Assistive Listening Device (ALD) / Mic In / Wireless Mic / Speakers

8. Assistive Listening Device (ALD) Port

9. Mic In Port

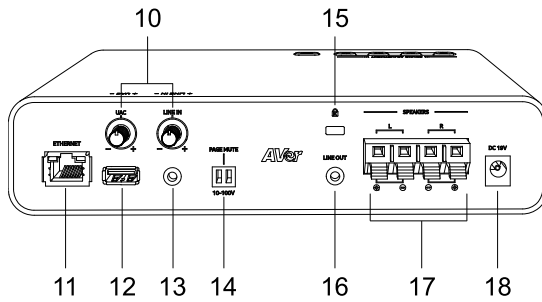

## Back Panel

10. Volume Controls:  
USB Audio Class (UAC) / Line In
11. Ethernet Port
12. USB Type-A Port
13. Line In Port
14. Page Mute Port
15. Kensington Lock
16. Line Out Port
17. Speaker Push-in Terminal Connector Block
18. DC Power Jack

## Pendant Microphones


### 1. Power/Mute Switch

Press and hold for 3 seconds to turn the microphone on or off.

### 2. Mic In Port

### 3. USB Type-C Port

### 4. Emergency Button (on Teacher Microphone)

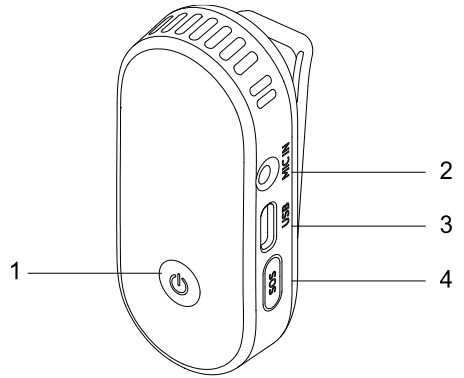


### 5. Volume Up/Down

### 6. Battery LED

- Solid green: Normal
- ★ Flashing red: Low battery

### 7. Status LED


- Solid blue: Paired
- ★ Flashing blue: Not transmitting to a receiver or out of range
- Solid red: Mute
- ★ Flashing red: Low battery

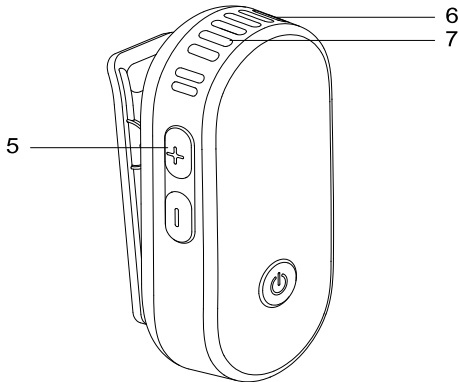

### 8. Battery Door


### 9. Lanyard Hook

### 10. Microphone Clip

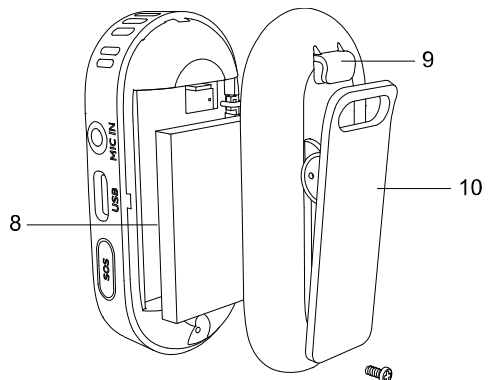

## Power Connection


Connect the included power adapter and power cord to a power outlet with earthing connection.

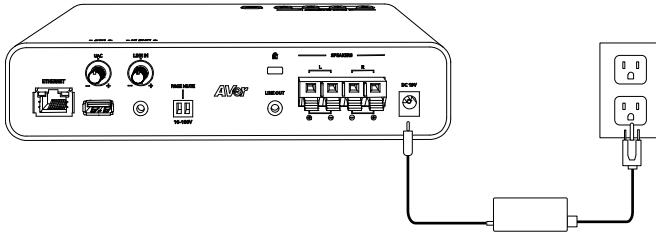

## Getting Started

### Set up Your SAB5V2 Streaming Audio Box

#### Insert the Microphone Receiver (Dongle)

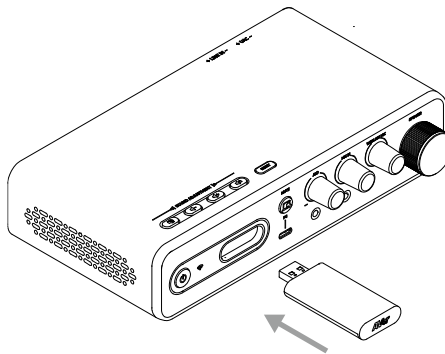

1. Remove the plug and insert the microphone receiver (dongle) included in the AVer AmpliWave Lite Audio System.
2. Short press the Power button to turn on the SAB5V2 Streaming Audio Box.

#### Notes:

Hot-plugging may damage your device. Please plug in the receiver before powering on and unplug it after powering off.

# Set up Your Microphone


## Pair Your Pendant Microphone



- Solid blue: Paired
- ★ Flashing blue: Not transmitting to a receiver or out of range



1. Make sure you have inserted the microphone receiver (dongle) and turned on the SAB5V2 Streaming Audio Box.
2. Press and hold the Power/Mute button on the microphone for 3 seconds until you see a solid green light, then release the button to continue the pairing process.
3. Pairing is successful when the status LEDs on both the microphone(s) and the SAB5V2 Streaming Audio Box turn solid blue.

## Use Your Microphone

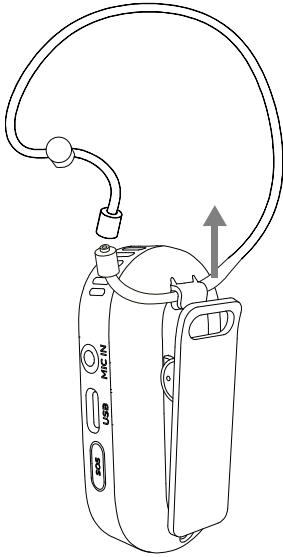

Please follow the instructions below for optimal audio quality.


1. Tuck the lanyard through the hook and pull hard to secure the lanyard. Then wear it around your neck.
2. Adjust the lanyard to position the microphone approximately 15cm (5.9") from mouth.
3. Press and hold the Power/Mute button for 3 seconds to power on > press again to mute > press and hold for 3 seconds to power off.
4. Adjust the volume with the Volume Up/Down buttons on the side of the microphone.
5. The microphone will automatically turn off:
  - When it is out of range and after 3 minutes of trying to connect.
  - After being muted for 30 minutes.

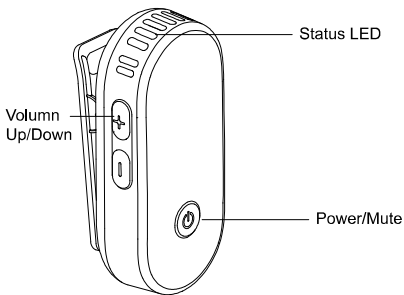

- Solid blue: Paired
- ★ Flashing blue: Not transmitting to a receiver or out of range
- Solid red: Mute
- ★ Flashing red: Low battery

## For Emergencies

The emergency feature is only available in the US.




1. Connect the SAB5V2 Streaming Audio Box to your local network with an Ethernet cable and the Device Management software.
2. Press and hold the SOS button on the Teacher Microphone for 3 seconds to broadcast your location.
3. Both status LED and battery LED will flash red.
4. Your microphone will work normally after pressing the button.

★ Status LED and battery LED flash red.

## Charge Your Microphone

- It will take less than 3 hours to fully charge your microphones.
- Your microphone can get up to 8-10 hours of talk time on a single charge.
- 10 minutes of charge will provide 1 hour of talk time.

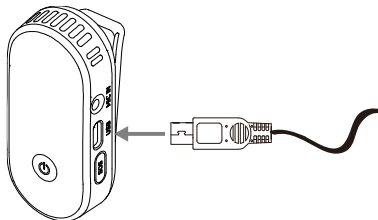

To charge, plug your microphone into a power source using the included USB Type-C cable.

The LED status indicates the following:


- Solid green: Fully charged
- Solid red: Charging



## Replace Your Microphone Battery

### Notes:

The battery should be replaced by its manufacturer, service technician or a similarly qualified person.



1. Turn off the microphone. Loosen the screw and open the battery door
2. Remove the battery by gently pulling up from the notch on the bottom.
3. Insert the replacement battery, close the battery door, and tighten the screw.

## Set up Your Speakers

### Connect Your Speaker Cables

1. Read the installation guide of your speakers to make sure it matches the SAB5V2 Streaming Audio Box specifications. Please refer to the [<Specification>](#) for more details.
2. Connect your speakers using standard speaker cables to the push-in terminal connector blocks on the back panel of the Streaming Audio Box.


### Notes:

1. For optimal performance, connect the AmpliWave Lite Audio System to two 15W 6-ohm speakers.
2. Maintain the speaker wiring impedance to 6-ohm when connecting to existing speakers or retrofitting a classroom with four ceiling speakers.

# Audio Features


## Page Mute

When the page mute input terminal sense a strong enough signal, it will automatically mute all other audio inputs sources. This is to allow that everyone can hear the broadcasts from the Public Address System.

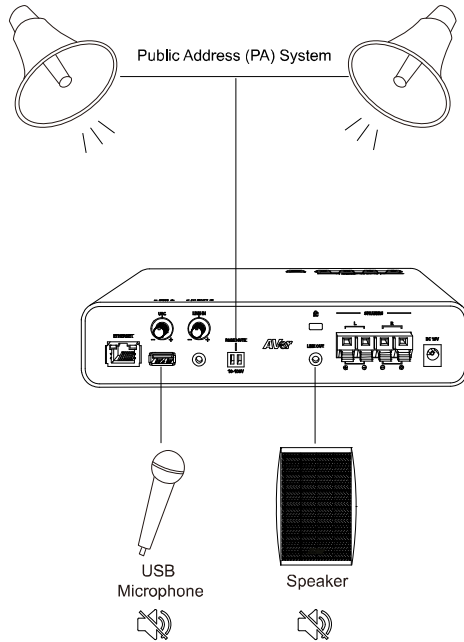


## Audio Output to Assistive Listening Devices (ALD)

Assistive listening devices (ALD) can help students hear a teacher speaking across the room or hear a conversation in a noisy room.


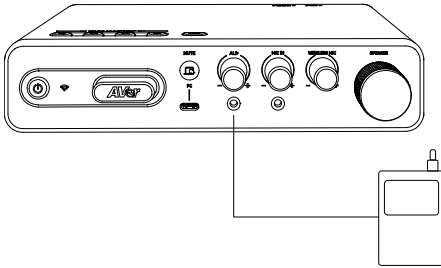


1. Turn the ALD volume control all the way down on the SAB5V2 Streaming Audio Box.
2. Plug your transmitter into the ALD port on the front panel of the SAB5V2 Streaming Audio Box using the included 3.5mm to 3.5mm stereo cable.
3. Speak into the microphone and slowly adjust the volume control for a suitable audio level.


## In the Classroom

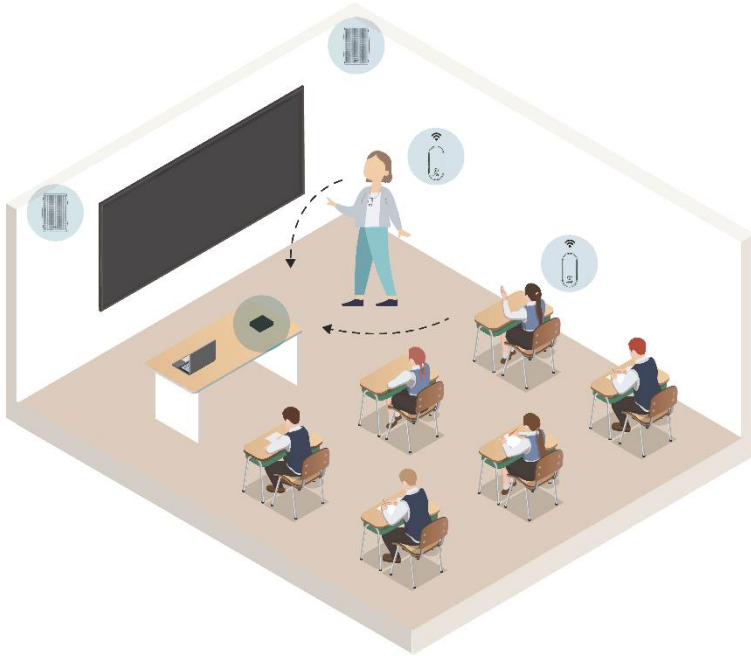


1. Short press to turn on the SAB5V2 Streaming Audio Box. Press and hold the Power/Switch button for 3 seconds to [pair your pendant microphone](#).
2. Or use a wired microphone by:
  - Plugging it into the Mic In port on the pendant microphone that has been paired with the SAB5V2 Streaming Audio Box.
  - Plugging it into the Mic In port on the front panel of the SAB5V2 Streaming Audio Box.

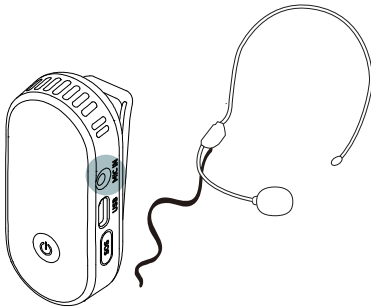

# Hybrid Learning

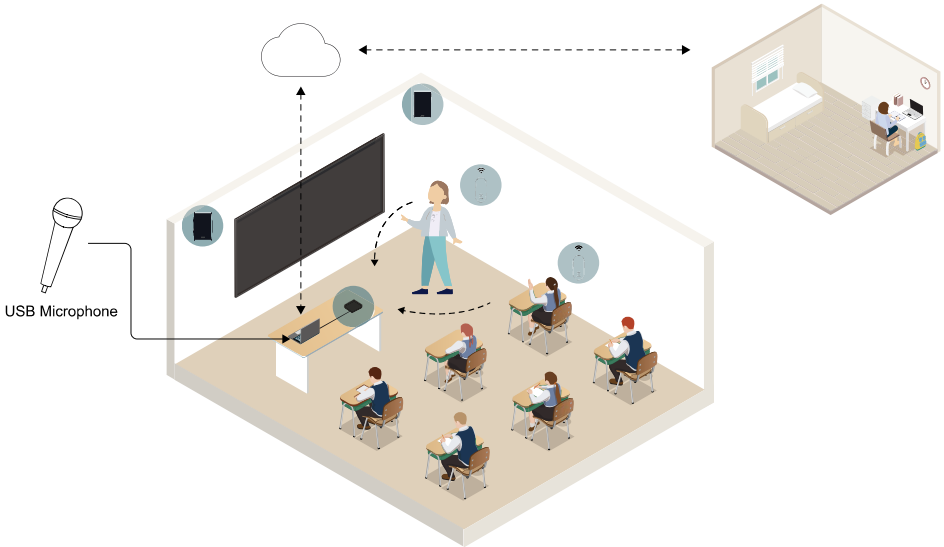


1. Short press to turn on the SAB5V2 Streaming Audio Box. Press and hold the Power/Switch button for 3 seconds to [pair your pendant microphone](#).
2. Connect devices. A slight popping sound during connection is considered a normal phenomenon.

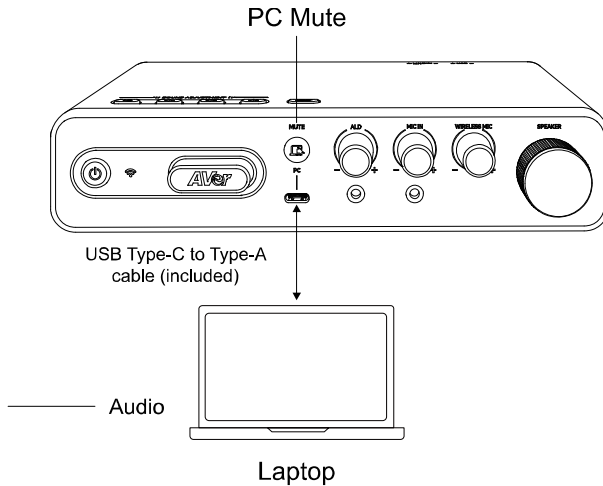

- **USB microphone**

When using your pendant or wired microphone, make sure your USB camera's built-in microphone (if any) is turned off to reduce feedback.

3. Open your video conferencing software, such as Google Meet, Skype, Microsoft Teams or Zoom, and select “SAB5 Series” as the microphone and speaker source.
4. Sound Adjustment Button behaviors:

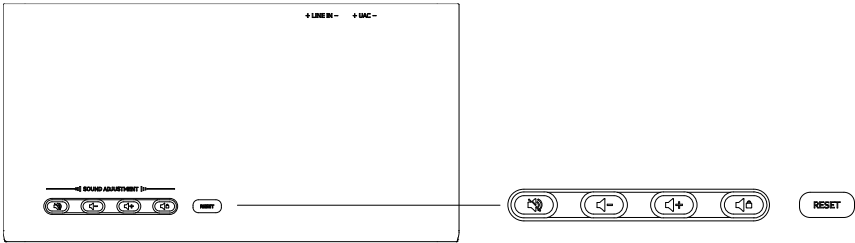

Icon	Action	Function
	Press and release	Mute the whole Audio System.
	Short press	Lower volume in steps.
	Long press	Lower volume continuously.
	Short press	Raise the volume in steps.
	Long press	Raise the volume continuously.
	Press and release	Lock / unlock the current volume settings, except the wireless microphone (RX) input.
<b>RESET</b>	Press and hold (10 seconds)	Reset to factory default settings.

5. How to use the PC Mute button:
  - Press to mute PC speakers and sounds from online students to reduce distraction in class. They will still be able to hear you.

# Web Application Settings

## Access to the web application

1. Download the **AVer IPCam Utility** from AVer Download Center:  
<https://www.aver.com/Downloads/search?q=AVer%20IPCam%20Utility%20for%20Camera%20IP%20Searching> and launch the software.
2. Click **Search** to see available devices on the same local area network (LAN).
3. Double-click on your SAB5V2's IP address in the **IPv4 Address** column to open the web interface in your browser. For first-time log in, the system will ask you to change the username and password.

The screenshot displays the AVer IPCam Utility interface. At the top left, the 'Network Device' section shows 'Intel(R) Ethernet Connection (12) I219-V' selected in a dropdown menu, with a 'Search' button. To the right is a 'Login' section with 'User ID' and 'Password' input fields. Below these are navigation tabs: 'Network Setting', 'Date/Time Setting', 'Maintenance', and 'Import/Export Config'. The 'Search Result' section contains a table with the following data:

No.	Status	Progress	Model Name	Device Name	FW version	IPv4 Address	MAC Address	IPv6 A
<input type="checkbox"/>	Working		PTC310UV2	AVer	0.1.0000.51 ...	10.100.90.20:80	02:00:70:98:76:05	[]:80
<input type="checkbox"/>	Working		FONE700	FONE700	0.0.8300.81	10.100.90.172:80	00:18:1a:60:33:cc	[]:80
<input checked="" type="checkbox"/>	Working		SAB5V2	SAB5V2	9.0.0000.00	10.100.90.21:80	00:18:1a:60:4e:aa	[]:80
<input type="checkbox"/>	Working		ProAV CAM-P1	ProAV CAM-P1	0.0.9900.09	10.100.90.63:80	00:18:1a:0c:b2:08	[]:80
<input type="checkbox"/>	Working		CAM550	CAM550	0.0.8004.71	10.100.90.67:80	00:18:1a:60:41:03	[]:80

Below the table is a 'Settings' section for the selected device 'SAB5V2\_SOS'. It includes radio buttons for 'DHCP' (selected) and 'Static IP'. The 'Start IP Address' is set to '10 . 100 . 90 . 21', 'End IP Address' is empty, 'Subnet Mask' is '255 . 255 . 255 . 0', 'Gateway' is '10 . 100 . 90 . 254', 'Primary DNS' is '10 . 100 . 1 . 6', and 'Secondary DNS' is '0 . 0 . 0 . 0'. There is an 'Apply' button at the bottom right.

### Note:

- Make sure your SAB5V2 is connected to the Internet.
- The IPCam Utility and your device must be on the same LAN.

**When logging in for the first time:**

Change the default username and password before logging in. The default username and password is **admin/admin**.


- **Username:** Use 1-32 characters.
- **Password:** Use 8-32 characters, including uppercase and lowercase letters, numbers, and symbols (%+=, -\_~/@.-). The password cannot be the same as the username.

**To change the network to DHCP or Static IP:**

1. Select the checkbox of your device.
2. Enter the default or changed username and password in the Login field.
3. Select DHCP or Static IP, then enter your network settings if applicable in the Settings section.
4. Click **Apply**.




# Device Status

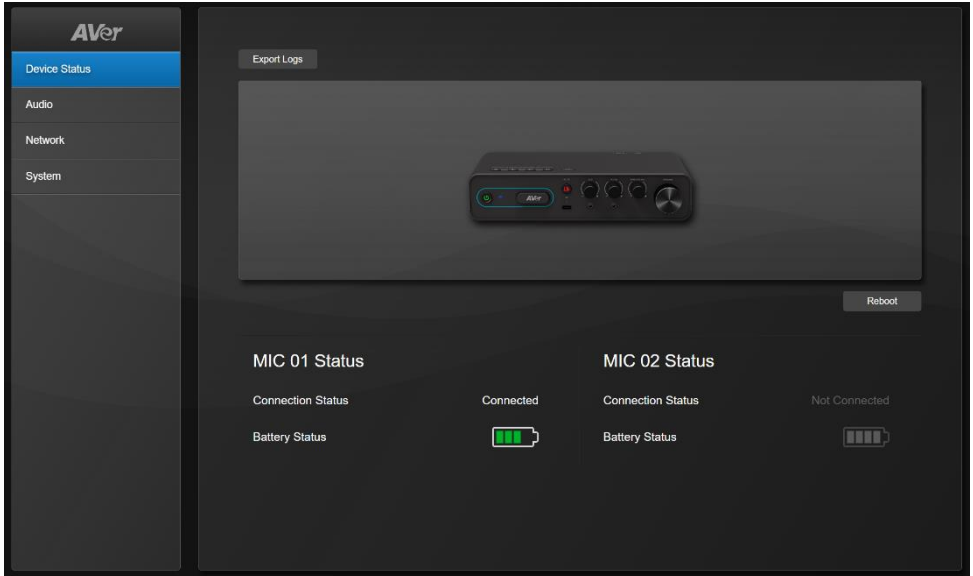

Item	Description										
Export Logs	Click to download the logs for current settings to your local files.										
Reboot	<ol style="list-style-type: none"> <li>1. Click to restart your Streaming Audio Box, and click <b>OK</b> on the pop-up window to continue. It may take a few minutes to reboot.</li> <li>2. Refresh your web browser and log in again when the reboot is finished.</li> </ol>										
Microphone Status	<p>View microphone connection status and battery status.</p> <ul style="list-style-type: none"> <li>• <b>Connection Status</b> Connected / Not Connected</li> <li>• <b>Battery Status</b></li> </ul> <table border="1"> <thead> <tr> <th>Icon</th> <th>Status</th> </tr> </thead> <tbody> <tr> <td></td> <td>Full battery</td> </tr> <tr> <td></td> <td>Remaining battery</td> </tr> <tr> <td></td> <td>Low battery</td> </tr> <tr> <td></td> <td>Out of battery</td> </tr> </tbody> </table>	Icon	Status		Full battery		Remaining battery		Low battery		Out of battery
Icon	Status										
	Full battery										
	Remaining battery										
	Low battery										
	Out of battery										

# Audio

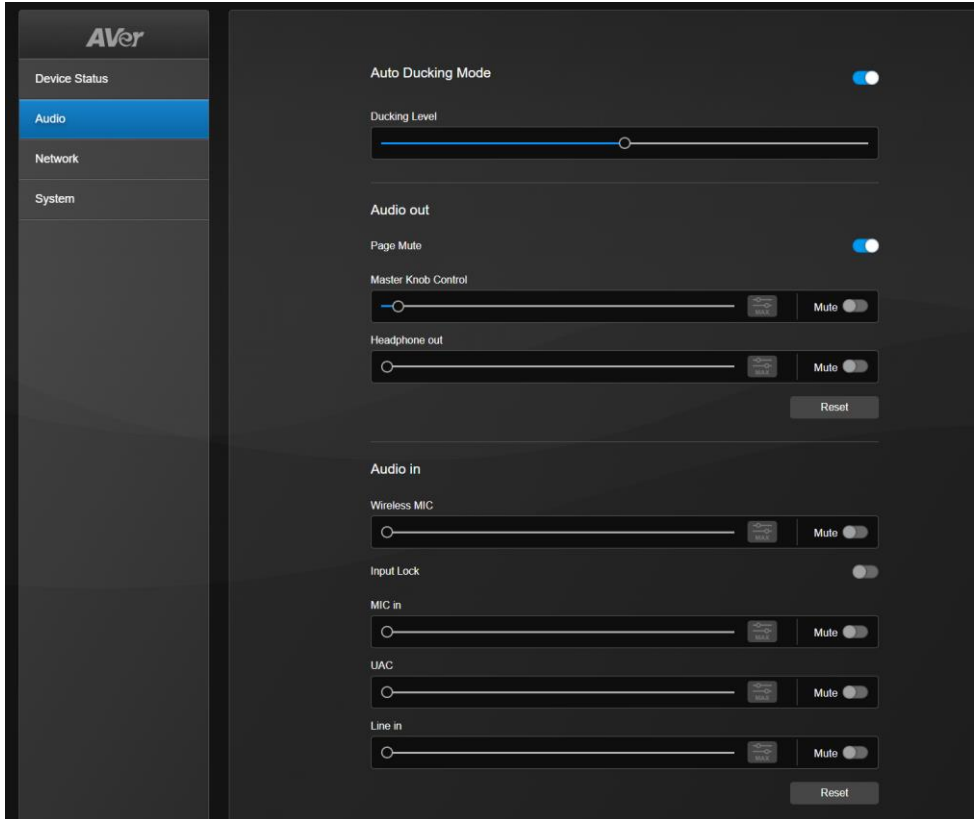


## Audio Ducking Mode

Turn on to temporarily lower the volume of all audio sources except the wireless microphone and the MIC input whenever a human voice is present, ensuring a focus on receiving human voices from the wireless microphone or the MIC input.


Drag the slider to adjust the ducking level.

## Audio Out


Item	Description
Page Mute	Click the toggle switch to turn on or off the public amplifier mute function. For more information about this function, please refer to <a href="#">&lt;Page Mute&gt;</a> .
Master Knob Control	<ul style="list-style-type: none"><li>Drag the slider to adjust the volume.</li></ul>

Headphone out	<ul style="list-style-type: none"> <li>Click <b>Max Volume Setting</b>  to set up the maximum volume. When finished, click <b>OK</b>. You can only adjust the volume in a certain range.</li> <li>Click the <b>Mute</b> toggle switch to mute or unmute each setting.</li> </ul>
Reset	Click to reset all the settings to factory default values.

## Audio In

Item	Description
Input Lock	Click the toggle switch to lock or unlock input settings. When the switch is on, you cannot change MIC in, UAC and Line in values.
Wireless MIC	<ul style="list-style-type: none"> <li>Drag the slider to adjust the volume.</li> </ul>
MIC in	<ul style="list-style-type: none"> <li>Click <b>Max Volume Setting</b>  to set up the maximum volume. When finished, click <b>OK</b>. You can only adjust the volume in a certain range.</li> </ul>
UAC	<ul style="list-style-type: none"> <li>Click the <b>Mute</b> toggle switch to mute or unmute each setting.</li> </ul>
Line in	<ul style="list-style-type: none"> <li>Click the <b>Mute</b> toggle switch to mute or unmute each setting.</li> </ul>
Reset	Click to reset all the settings to factory default values.

# Network

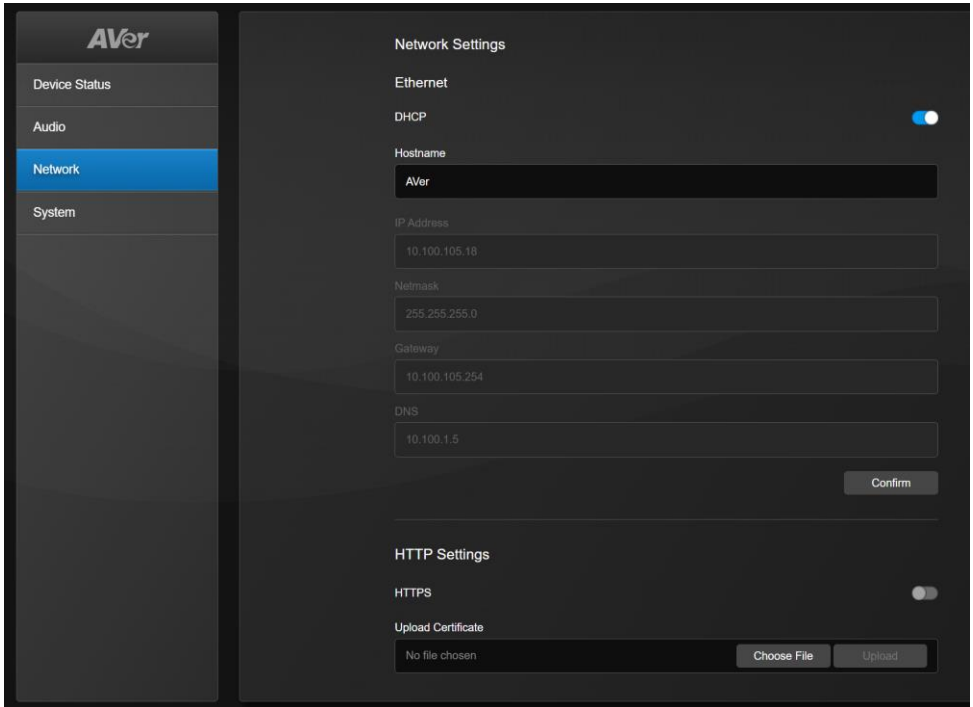

## Network Setting


Item	Description
DHCP	Click the toggle switch to switch between DHCP and Static IP. <ul style="list-style-type: none"><li>• <b>DHCP</b>: The system will assign a related IP address to the device.</li><li>• <b>Static IP</b>: You may manually enter <b>IP Address</b>, <b>Netmask</b>, <b>Gateway</b> and <b>DNS</b>.</li></ul>
Hostname	Click to edit the <b>Hostname</b> . When finished, click <b>Confirm</b> .
IP Address	
Netmask	1. Turn off the <b>DHCP</b> toggle switch to switch to Static IP.
Gateway	2. You may manually enter <b>IP Address</b> , <b>Netmask</b> , <b>Gateway</b> and <b>DNS</b> in the text boxes.
DNS	3. When finished, click <b>Confirm</b> .

## HTTPS Settings

Click the **HTTPS** toggle switch to turn on or off the function. When **HTTPS** function is on, it will establish a secure connection between your browser and your Streaming Audio Box.

1. Create a SSL certificate file for encryption and decryption.
2. In **Upload Certificate** setup field, click **Choose File** to select the certificate file on your computer.
3. When finished, click **Upload**.





# System

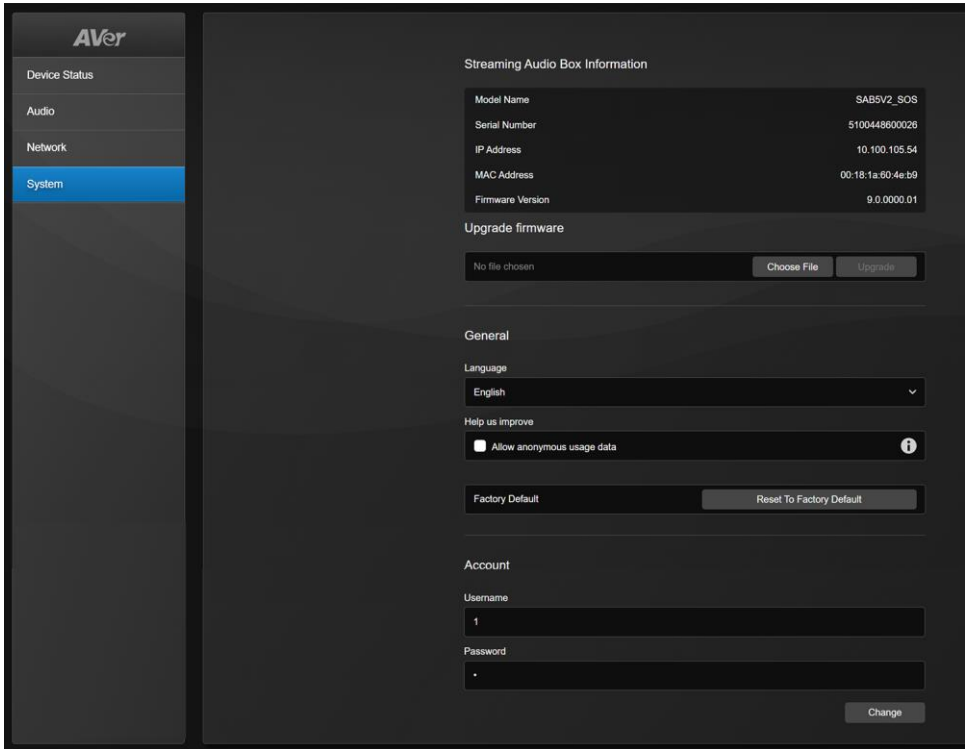

Item	Description
Streaming Audio Box Information	View your device information, including <b>Model Name</b> , <b>Serial Number</b> , <b>IP Address</b> , <b>MAC Address</b> , and <b>Firmware Version</b> .
Upgrade Firmware	<ol style="list-style-type: none"><li>1. Download firmware update file from Aver Download Center to your computer.</li><li>2. Click <b>Choose File</b> to select the firmware update file.</li><li>3. Click <b>Upgrade</b> to upgrade your device firmware.</li></ol>
Language	Select from the drop-down list to change the system language.
Help us improve	Select or unselect the checkbox to allow or don't allow to send anonymous usage data to AVer.
Factory Default	Click <b>Reset To Factory Default</b> to set all settings to factory default values.
Username	Change the login username in the text box. When finished, click <b>Change</b> .
Password	Change the login password in the text box. When finished, click <b>Change</b> .

# Specification

## SAB5V2 Streaming Audio Box

DC Power	19V
Standby Mode	<1.5W (WoL)
Power Consumption	65W max.
Dimensions (W x D x H)	210 x 110 x 48.5mm (excluding rubber)
Net Weight	530g ±50g
Power Button	<ul style="list-style-type: none"><li>● Solid green: Power on</li><li>★ Flashing green: Start-up</li><li>● Solid red: Wake-on-LAN mode (when connected to power)</li><li>★ Flashing red: Updating firmware or resetting to factory default.</li><li>● Solid orange: Input lock mode</li></ul>
Status LED	<ul style="list-style-type: none"><li>● Solid blue: Microphone(s) is paired</li><li>○ Off: Microphone(s) isn't paired</li></ul>
PC Mute Button	<ul style="list-style-type: none"><li>● Solid red: PC is muted</li><li>○ Off: PC isn't muted</li></ul>
Top Cover Sound Adjustment Buttons	<ul style="list-style-type: none"><li> Mute the whole Audio System.</li><li> Volume down.</li><li> Volume up.</li><li> Lock the current volume settings, except the wireless microphone (RX) input.</li><li><b>RESET</b> Reset to factory default settings.</li></ul>
PC Port	USB Type-C
ALD Port	3.5mm stereo for assistive listening devices
Mic In Port	3.5mm mono

<b>UAC Port</b>	USB Type-A 2.0
<b>Line In Port</b>	3.5mm stereo
<b>Line Out Port</b>	3.5mm stereo
<b>Speaker Out</b>	6-ohm speaker push-in terminal connector block
<b>Ethernet Port</b>	1
<b>DC Power Jack</b>	19V
<b>Kensington Lock</b>	1
<b>Page Mute Port</b>	1



## Pendant Microphones

	Teacher	Student
<b>Style</b>	Pendant with clip and lanyard	
<b>Channels</b>	1	
<b>Transmission Type</b>	Wireless	
<b>Wireless Frequency</b>	2.4 GHz	
<b>Frequency Response</b>	50 Hz - 20 kHz	
<b>Coverage</b>	20m (65 ft.)	
<b>Microphone Capsule</b>	Omni-directional electret condenser	
<b>Battery</b>	Rechargeable and removable Li-ion battery	
<b>Battery Power</b>	3.7V	
<b>Talk Time</b>	8-10 hours	
<b>Charging Time</b>	<3 hours	
<b>Charging Method</b>	USB Type-C	
<b>Dimensions (W x D x H)</b>	Microphone: 33 x 20.2 x 73.3mm (excluding clip) Receiver: 55 x 30 x 10mm	
<b>Net Weight</b>	35g	
<b>Power/Mute Switch</b>	Press and hold the Power/Mute button for 3 seconds to power on > press again to mute > press and hold for 3 seconds to power off.	
<b>Volume</b>	Up/Down buttons	
<b>Safety Alert</b>	SOS button	N/A
<b>Status LED</b>	<ul style="list-style-type: none"> <li>● Solid blue: Paired</li> <li>★ Flashing blue: Not transmitting to a receiver or out of range</li> <li>● Solid red: Mute</li> <li>★ Flashing red: Initiating an SOS Rescue (Teacher)</li> </ul>	

<b>Battery LED</b>	<p>When in use:</p> <ul style="list-style-type: none"> <li>● Solid green: Normal</li> <li>★ Flashing red: Low battery</li> </ul> <p>When charging:</p> <ul style="list-style-type: none"> <li>● Solid green: Fully charged</li> <li>● Solid red: Charging</li> </ul>
<b>Mic In Port</b>	3.5mm stereo
<b>USB Type-C Port</b>	1
<b>Power Rating</b>	5 VDC, 0.4A

## Wireless Receiver Dongle

<b>Transmission Type</b>	Wireless
<b>Wireless Frequency</b>	2.4 GHz
<b>Power Rating</b>	5 VDC, 0.5A

## Environmental Specifications

<b>Working temp.</b>	0°C - 40°C
<b>Working RH</b>	10% - 90%
<b>Storage temp.</b>	-30°C - 60°C
<b>Storage RH</b>	10% - 90%

Specifications are subject to change without prior notice.

# Troubleshooting

## Microphone doesn't pair.

- Make sure the SAB5V2 Streaming Audio Box is turned on. A solid green or orange light on the Power button will indicate that it is powered on.
- Make sure the SAB5V2 Streaming Audio Box is not placed in an enclosed space where the Wi-Fi signal may be obstructed.
- Press and hold the Power/Mute button on the microphone for 3 seconds to power off, and try pairing again.



## No or low volume from the microphone.

- Make sure the microphone is not muted. A solid red light on top of the microphone indicates that it's muted.
- Adjust the volume with the Volume Up/Down buttons on the side of the microphone.
- Position the microphone approximately 15cm (5.9") from mouth for optimal audio quality.

## I hear feedback (squealing).

- The volume may be too high. Adjust the Volume Up/Down buttons on the side of the microphone.
- The microphone may be too close to the speaker. Move the microphone away from the speaker.

## No sound for the speaker

- Make sure the SAB5V2 Streaming Audio Box is turned on. A solid green or orange light on the Power button will indicate that it is powered on.
- Check if the SAB5V2 Streaming Audio Box is not muted. If yes, press the Mute Speaker button  on the top of the Audio Box to unmute.
- Make sure the SAB5V2 Streaming Audio Box volume input is unlocked. If you see a solid orange light on the Power button, press the lock/unlock button  to unlock input settings. The Power button will display a solid green light, and try increase speaker volume to resolve the issue.