


CUSTOM CHARGE



Step 1: Press **Esc** button.

Step 2: Press **-** button, go to
CUSTOM-CHARGE.

Step 3: Press **Enter** button.

- SET TIME
- VIEW SETTING

1.SET TIME
2.VIEW SETTING


START CHARGE
CH1/2/3(4/N)PM

SETTING COMPLETE
PRESS ENTER

Note.

- Charging period can be adjusted at 1 HR interval; max charging time is 8 HR.
- to check current charging setting,
Enter update the setting.
- Select "Y" to execute CUSTOM-CHARGE.
Select "N" to execute CUSTOM-CHARGE.

INFORMATION

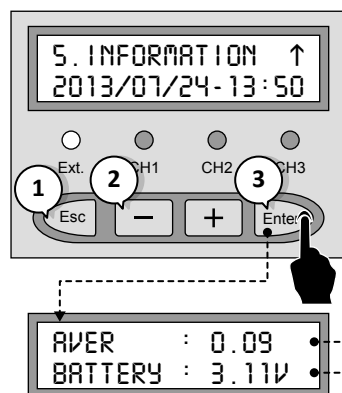

Step 1: Press **Esc** button.



Step 2: Press **-** button, go to
INFORMATION.

Step 3: Press **Enter** button.

Note.



- Firmware version.
- Remaining battery capacity of the charging timer.

CHARGING TIMER

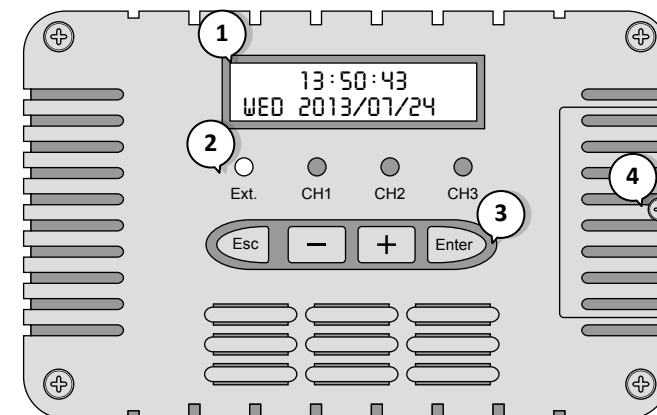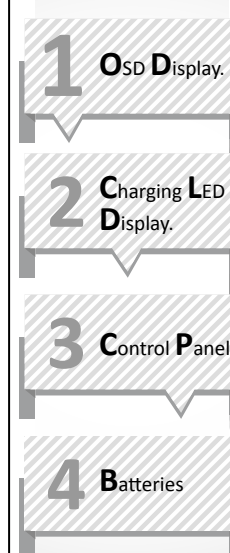
**Caution:**

By default, you only need to push the LED button inside the front side panel to active or deactivate the charging mechanism. However, if you had previously used the scheduling function in the Timer to set the charging times, your scheduled charging events will be interrupted if the Timer's batteries have drained completely. To remedy this, change both batteries and re-set the Timer to the current time.

OSD CONTROL OPERATION



Step 2: **-** **↓** **+** **↑**



Step 3: Press "Enter" button.

1. 4HR-CHARGE
2. CUSTOM-CHARGE


2. CUSTOM-CHARGE
3. SCHED-CHARGE

3. SCHED-CHARGE
4. SET TIME

4. SET TIME
5. INFORMATION

5. INFORMATION
2013/07/24-13:50


SET TIME

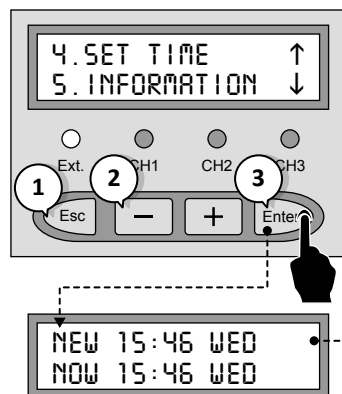

- Step 1:** Press **Esc** button.
- Step 2:** Press **-** button, go to **SET TIME**.
- Step 3:** Press **Enter** button.

Note.
- to set the present time.

DEFAULT CHARGE - 4HR CHARGE

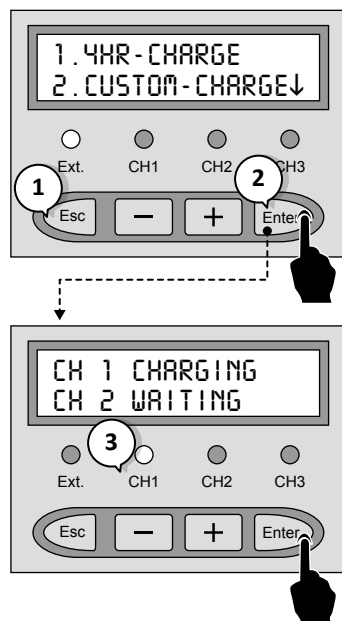


- Step 1:** Press **Esc** button.
- Step 2:** Press **Enter** button.
- Step 3:** Charging starts from channel 1, and moves to channel 2 and 3 sequentially.

Note.
- By pressing the **Esc** button, charging will be **"Paused"**.

Tips!
- Press and hold the **Esc** button for 4 sec to return to the Home screen.

SCHEDULE CHARGE

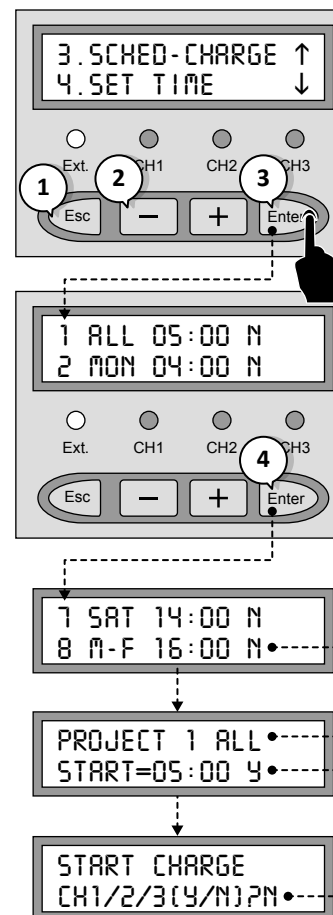

- Step 1:** Press **Esc** button.
- Step 2:** Press **-** button, go to **SCHEDULE-CHARGE**.
- Step 3:** Press **Enter** button to edit.

Note.

- Scheduled charge on:
Mon, Tue, Wed, Thu, Fri, Sat (**M-F**)
or Mon to Sun (**ALL**)
- Select **"Y"** to confirm schedule.
Select **"N"** to disable schedule.
- Select **"Y"** to execute SCHEDULE-CHARGE.
Select **"N"** to disable SCHEDULE-CHARGE.